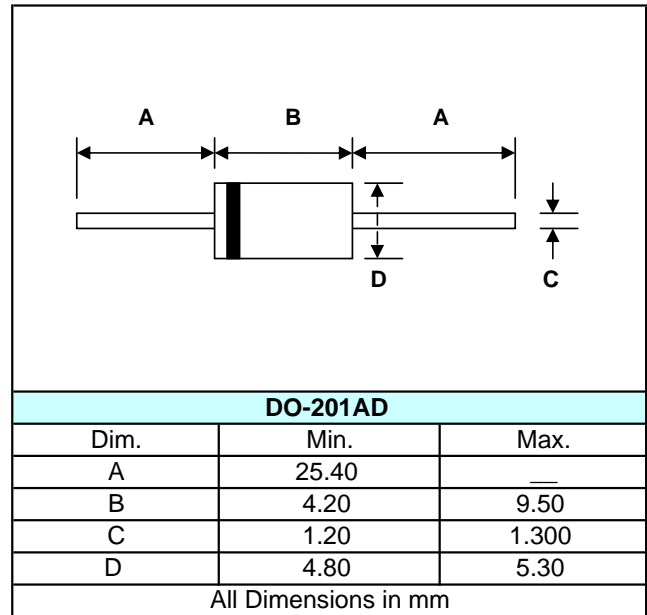


**FEATURE**

- ◆ Schottky Barrier Chip
- ◆ Guard Ring Die Construction for Transistor Protection.
- ◆ High Current Capability
- ◆ Low Power Loss. High Efficiency
- ◆ High Surge Current Capability
- ◆ For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications.

MECHANICAL DATA


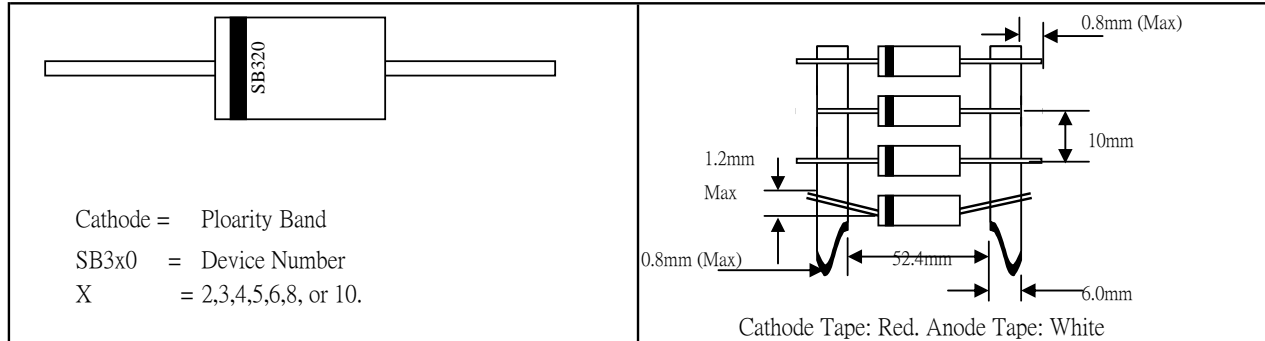
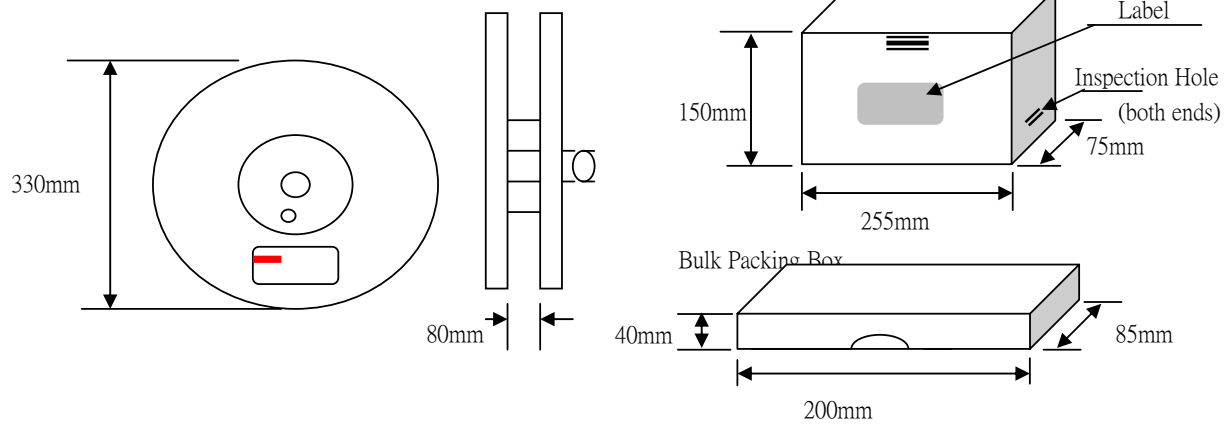
- ◆ Case: DO-201AD, Molded Plastic.
- ◆ Terminals: Solder Plated, Solderable per MIL-STD-202, Method 208
- ◆ Polarity: Cathode Band.
- ◆ Marking: Type Number
- ◆ Weight: 1.2 grams (approx.)
- ◆ Mounting Position: Any
- ◆ Lead Free: For RoHS / Lead free Version, Add "LF" suffix to part Number, See page 4.

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS @TA = 25°C unless otherwise specified**

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current bt 20%.

Characteristic	Symbol	SB320	SB330	SB340	SB350	SB360	SB380	SB3100	Unit
Peak Repetitive Reverse Voltage	VRRM								
Working Peak Reverse Voltage	VRWM	20	30	40	50	60	80	100	V
DC Blocking Voltage	VR								
RMS Reverse Voltage	VR(RMS)	14	21	28	35	42	56	70	V
Average Rectified Outpot Current @TL=95℃ (Note 1)	Io	3.0							A
Non-Repetitive Peak Forward Sutge Current	IFSM	80							A
8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)									
Forward Voltage @IF=3.0A	VFM	0.50		0.70		0.85		V	
Peak Reverse Current @TA=25℃	IRM	0.5							mA
At Rated DC Blocking Voltage @TA=100℃									
Typical Junction Capacitance (Note 2)	Cj	250							pF
Typical Thermal Resistance (Note 1)	RθJA	20							℃/W
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150							℃

Note: 1). Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.
2). Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

**MARKING INFORMATION****MARKING INFORMATION**

Packaging (mm)	Quantity (PCS)	Reel Daimeter Box Size (mm)	Carton Size LxWxH (mm)	Quantity (PCS)	Approx Gross Weight (KG)
Tape & Reel	1200	330	370x370x420	6000	10.0
Tape & Box	1200	255x75x150	400x273x415	12000	17.0
Bulk Box	500	200x85x40	459x214x256	12500	16.0

- Note: 1). Paper reel, white or gray color. Core material: plastic or metal.
2). Components are packed in accprdance with EIA standar RS-296-E

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity	Product No.	Package Type	Shipping Quantity
SB320-T3	DO-201AD	1200/Tape & Reel	SB360-T3	DO-201AD	1200/Tape & Reel
SB320-TB	DO-201AD	1200/Tape & Reel	SB360-TB	DO-201AD	1200/Tape & Reel
SB320	DO-201AD	500 Unit/Box	SB360	DO-201AD	500 Unit/Box
SB330-T3	DO-201AD	1200/Tape & Reel	SB380-T3	DO-201AD	1200/Tape & Reel
SB330-TB	DO-201AD	1200/Tape & Reel	SB380-TB	DO-201AD	1200/Tape & Reel
SB330	DO-201AD	500 Unit/Box	SB380	DO-201AD	500 Unit/Box
SB340-T3	DO-201AD	1200/Tape & Reel	SB3100-T3	DO-201AD	1200/Tape & Reel
SB340-TB	DO-201AD	1200/Tape & Reel	SB3100-TB	DO-201AD	1200/Tape & Reel
SB340	DO-201AD	500 Unit/Box	SB3100	DO-201AD	500 Unit/Box
SB350-T3	DO-201AD	1200/Tape & Reel			
SB350-TB	DO-201AD	1200/Tape & Reel			
SB350	DO-201AD	500 Unit/Box			

- 1). Products listed in bold are WTE Preferred devices.
2). Shipping quantity given in minimum packing quantity only, for minimum order quantity, please consult the Sales Department.
3). To oder RoHS /Lead Free version (with Lead Free finish), add "LF" suffix to part number above, for example, SB320-TB-LF.